



GREATER HYDERABAD MUNICIPAL CORPORATION

హైదరాబాద్ మహానగరపాలక సంస్థ



O/o. The Executive Engineer, PD-NZ, GHMC, 7<sup>th</sup> Floor, Parking Complex, Abids, Hyderabad.  
e-mail: [pd3ghmc.08@gmail.com](mailto:pd3ghmc.08@gmail.com) ; AE Ph.No.7337557276

L.No. 60 /EE/PD-NZ/GHMC/2024-25

Dated:03.03.2025

To  
**The Commissioner,**  
Information & Public Relations Department,  
Govt of Telangana, Samachar Bhavan,  
A.C.Guards, Hyderabad - 500028.

Sir,

Sub:- GHMC – EE - PD-NZ - Publication of Quotation Notice in Newspapers – Three different languages – Reg.


Ref:- Quotation Notice No. 06/EE/PD-NZ/GHMC/2024-25 Date :03.03.2025

\*\*\*\*\*

With reference to the subject cited, it is requested to arrange for the publication of Notice inviting Sealed Quotations for **Non SSR items** in three News Papers having **wide** circulation immediately as per the instructions of the Commissioner, GHMC.

Yours faithfully,

*E. Sanyal*  
13/3/25  
Executive Engineer  
PD-NZ, GHMC

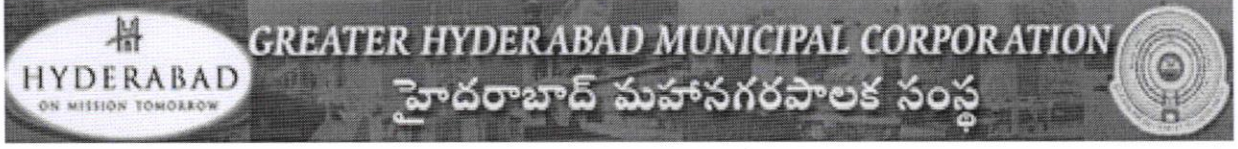

## TENDER NOTICE

NIT No.	Name of the work	Last Date & Time for Receipts of Bids	Name & Address of the Officer Cell.No.
Quotation Notice No.06/EE (PD-NZ)/GHMC/2024-25/ Date : 03.03.2025	Sealed Quotations for <b>Non-SSR items of</b> i) Supply of Pre-cast CC blocks of 600mm length for kerbing-M30 Grade ii) Fixing of Pre-cast RCC kerbing blocks of 600mm length iii) Translocation of trees a) Girth less than 600mm b) Girth more than 600mm but less than 1400mm c) Girth more than 1400mm iv) Cost of transportation of trees upto 10km	Start Date: 04.03.2025, 11.00 AM  Last date: 11.03.2025, 05.00 PM	EE, PD-NZ, GHMC Cell No. 9959442013

**Note: Detailed specifications and Conditions for Submission of Quotations can be downloaded from the website [www.ghmc.gov.in](http://www.ghmc.gov.in). For further information contact AEE 9154172341.**

*E. Sujanya*  
Executive Engineer  
PD-NZ, GHMC

## Quotations invited for Non-SSR Items for

**Preparation of Estimate for Proposed 100'-0" road from Lalapet Flyover (Ambedkar Statue) to Moula Ali Flyover in Lalapet.**


S. No.	Item Description	Unit
1	Supply of Pre-cast CC blocks of 600mm length for kerbing made with rubberized moulds of M-30 grade Design mix with 350 Kgs. Cement / Cum of concrete 20mm to 6 mm nominal size (SS 5) Hard Granite machine crushed metal @ 0.80 Cum/Cum. Of concrete and sand @ 0.40 Cum/Cum of concrete including cost and conveyance of all materials like cement, sand, coarse aggregate water etc.	No's
2	Fixing of Pre-cast RCC kerbing blocks of 600mm length true to alignment as specified by department including pointing with cement mortar 1:3 incl. cost and conveyance of all materials like cement, sand, coarse aggregate water etc., to site and labour charges for mixing complete for finished item of work.	No's
3	Translocation of trees including cost of earth mover for trenching at the present site as well as new site, pruning of the tree, packing the root ball carefully, putting necessary chemicals, Labour charges and cost of protecting the tree for 2 months from the date of translocation by timely watering etc., complete but excluding the cost of transportation of tree a) Girth less than 600mm b) Girth more than 600mm but less than 1400mm c) Girth more than 1400mm	Each
4	Cost of transportation of trees upto 10km by loading and unloading carefully into the tipper including machinery complete	Each

**Sealed quotations to be submitted in the office of the Executive Engineer (Project Division-NZ), Greater Hyderabad Municipal Corporation 7<sup>th</sup> Floor, Parking Complex, Abids, Hyderabad**

**Mail id : [pd3ghmc.08@gmail.com](mailto:pd3ghmc.08@gmail.com)**

**Contact : AEE - 9154172341**

**Note : The rate quoted shall be excluding GST.**

  
Executive Engineer,  
PD-NZ, GHMC